
GEO FLOORING
ABPure Imagine

Informed flooring decisions based on science.

More than ever, institutions rely on rigorous cleaning and disinfection programs to limit the spread of infections in the built environment. Choosing durable and easy to clean flooring becomes essential.

ABPURE® Nfuse® was tested with EPA List-N recommended disinfectants and showed the most positive response, being the least prone to tarnish with increased disinfection protocols compared to other rubber floors.



Declare.

Red List Free
INTERNATIONAL LIVING FUTURE INSTITUTE

What is Declare?

The program provides a clear and informative label for building products and supports the Living Building Challenge's Red List for material transparency and toxic chemical avoidance as well as simplifying material specification and project certification.

What is the Red List and what does it mean to be Red List Free?

The Red List represents the "worst in class" materials, chemicals, and elements known to pose serious risks to human health and the greater ecosystem. For a product to be awarded Red List Free status means that it does not contain any ingredients on the Living Building Challenge Red List.


To learn more about the Living Building Challenge,
visit www.living-future.org/lbc.

PVC Free

Nfuse technology

ABPure Nfuse is occupancy ready rubber flooring allowing to save time and money during installation and beyond and is a better choice for environmental stability.



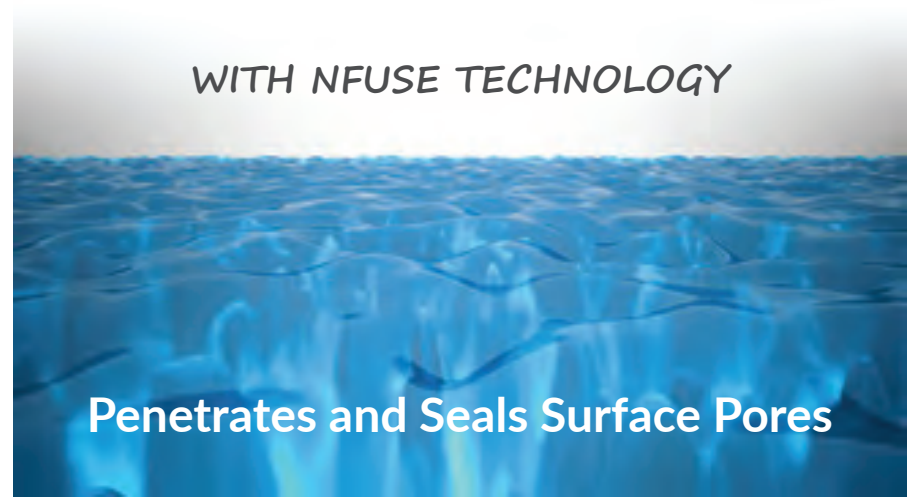

Nfuse technology is an overall product treatment technology that penetrates into the pores and seals the flooring.

- No initial set up required
- Immediate access
- No waxing, stripping or sealant, for the lifetime of the floor, which means no negative impact on wastewater systems and better indoor air quality
- Excellent stain and tarnish resistance

ABPURE Nfuse It's PURE Science.

Easy to clean & disinfect


- Tested with EPA List N disinfectants approved for use against Sars-Cov-2
- Superior colour, stain, and tarnish resistance
- Consult the white paper on reaction of re-peated disinfectant protocols. Contact GEO Flooring for information

Exceptional Colourfastness

- Patented formulation that avoids colour fading
- Best colourfastness and UV stability meeting ASTM-F 1515 requirements
- 10 year colourfastness guarantee

PVC Free Flooring

Does not contain additives, such as phthalates and chlorine, which have raised health concerns due to their potential impacts on human health. PVC free flooring has a low level of Volatile Organic Com-pounds (VOC's) which can help improve indoor air quality and reduce potential health problems such as headaches, respiratory problems, and nausea.



Crisp & Clean Colours

- 36 colours
- Pure white
- Clean beiges and crisp blues
- Available in tile and sheet
- Custom colours on demand no problem!

Ergonomic & Acoustic Benefits

- Reduces ambient noise
- Ideal for environments such as: hallways, cafeterias, multipurpose rooms, classrooms, breakrooms, etc
- Underfoot comfort - more flexible than hard surfaces


Custom Colours

Available for ABPURE® collections.

Let your brand do the talking

Work with our colour lab to create on-demand colours to match your institution's brand or to achieve your design vision.



Suited for High Traffic Areas
Excellent Footfall Sound Absorption
Underfoot comfort
PVC Free
Declare - Red List Free

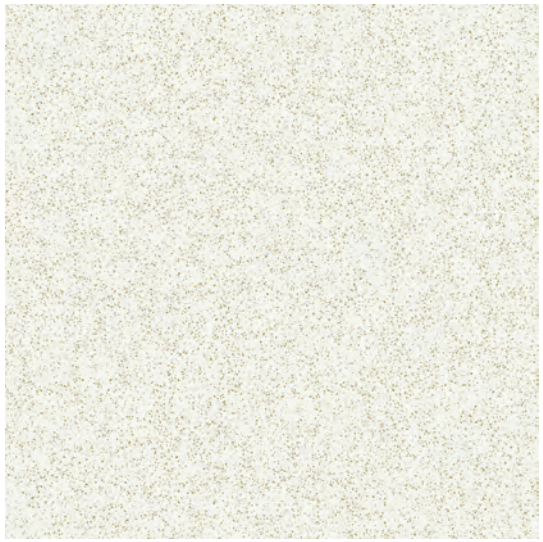

Snowstorm - 15
LRV 83.8



Starry Night - 20
LRV 5.1

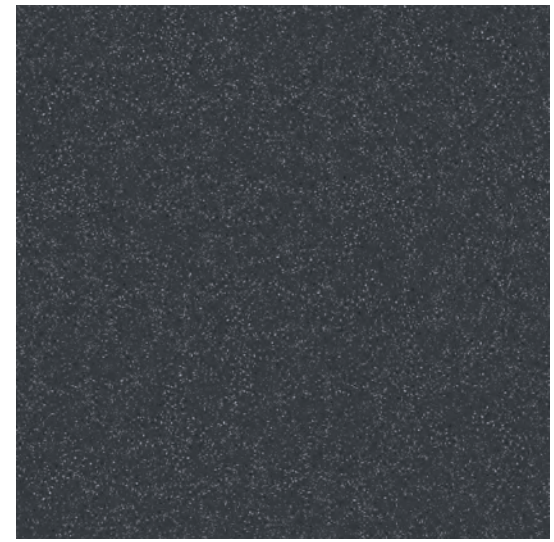


Anthracite - 23
LRV 10.9




Sand Castle - 30
LRV 56.1




Gainesboro Valley - 31
LRV 53.9

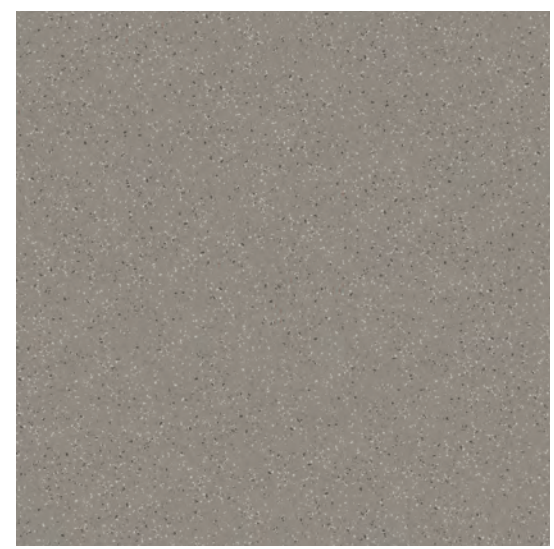


Appalachian Trail - 32
LRV 29.7

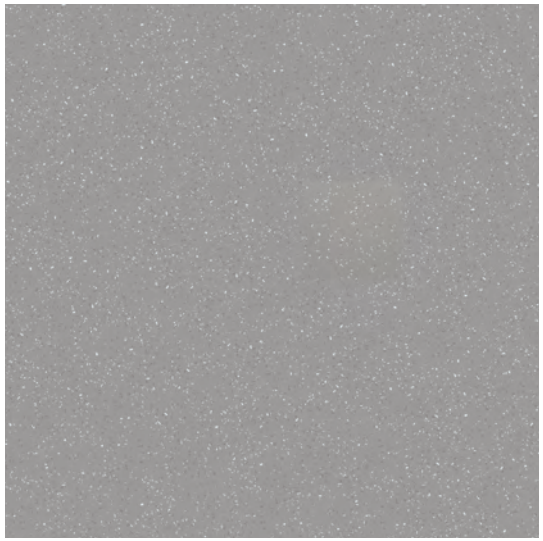

Pebble Beach - 33
LRV 36.8

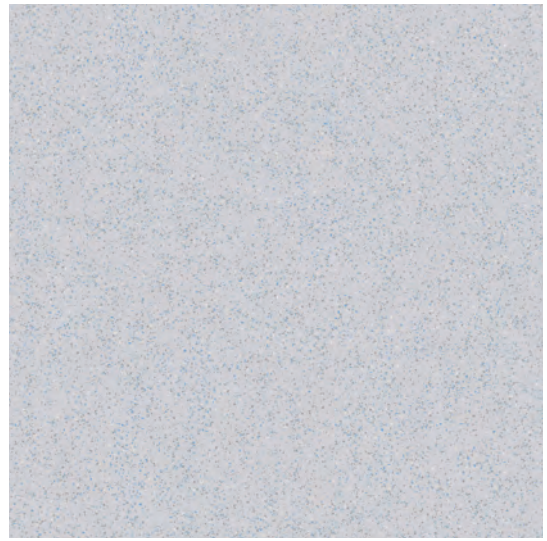


Glacier - 34
LRV 54.6

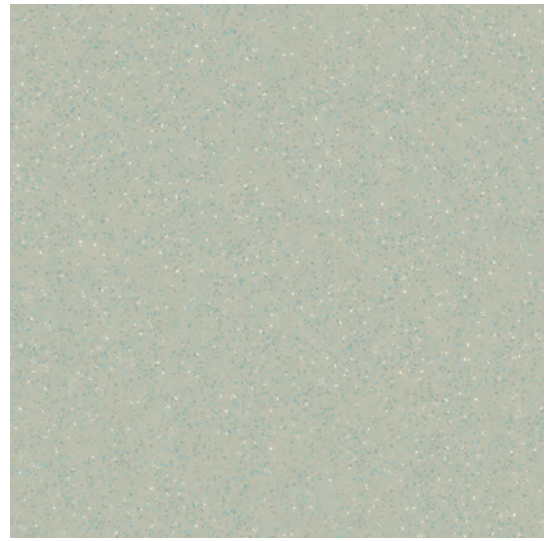


Ash Grey - 35
LRV 46.9




Tan - 36
LRV 31.4

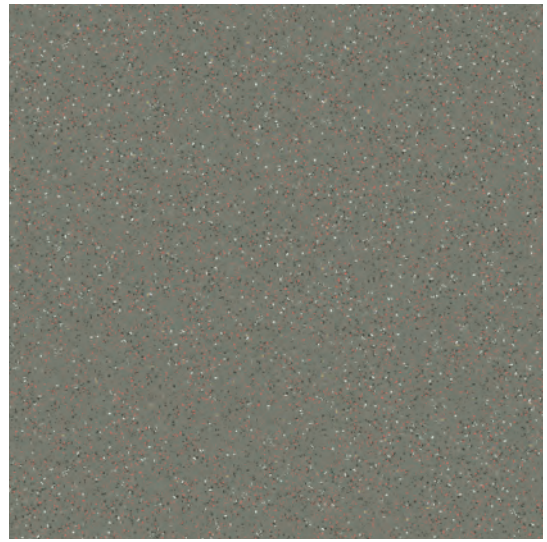

Battleship Grey - 37
LRV 24.0

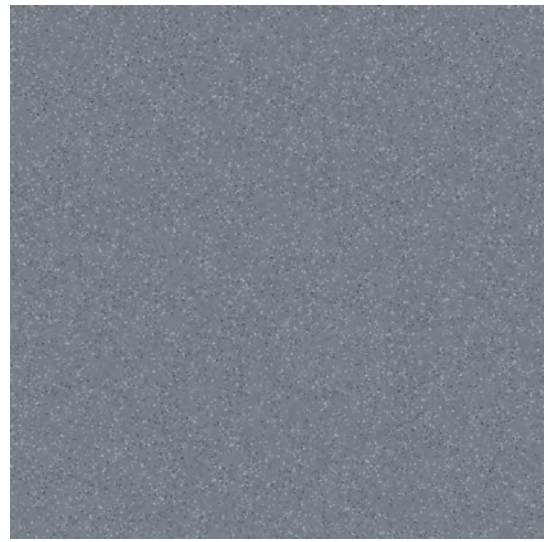


Steel - 38
LRV 25.0

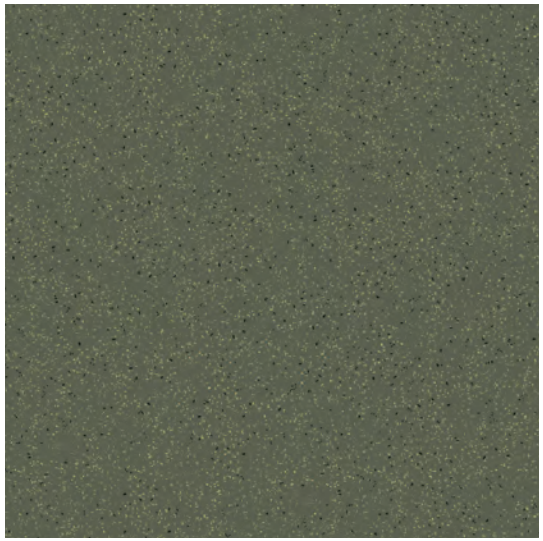


Camouflage Green - 39
LRV 17.7




Linen - 41
LRV 75.0

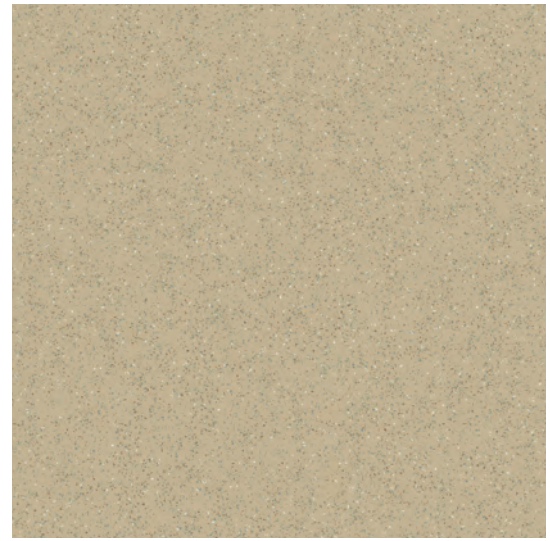


Wheat - 45
LRV 47.2

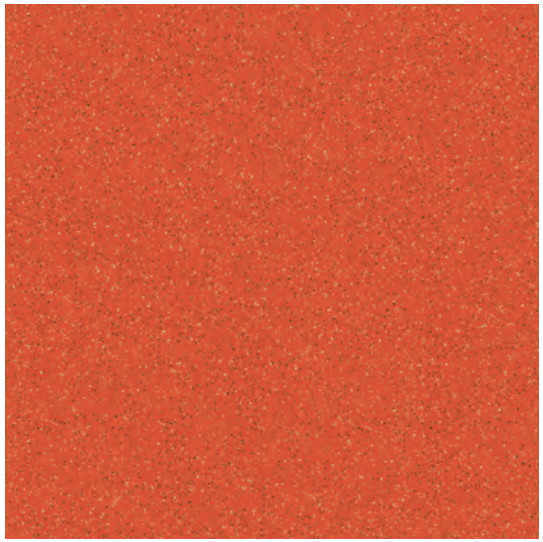


Capuchin - 51
LRV 24.5

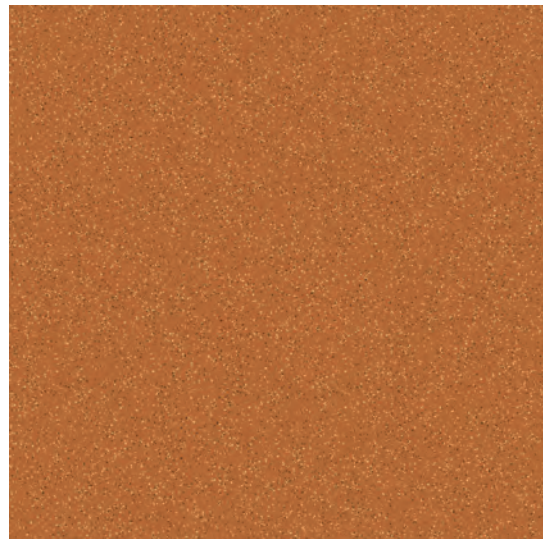


Terracotta - 52
LRV 24.7

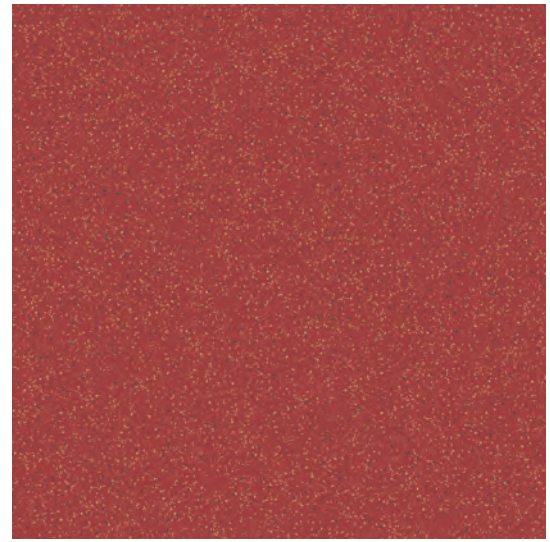

Land Of Fire - 53
LRV 15.4

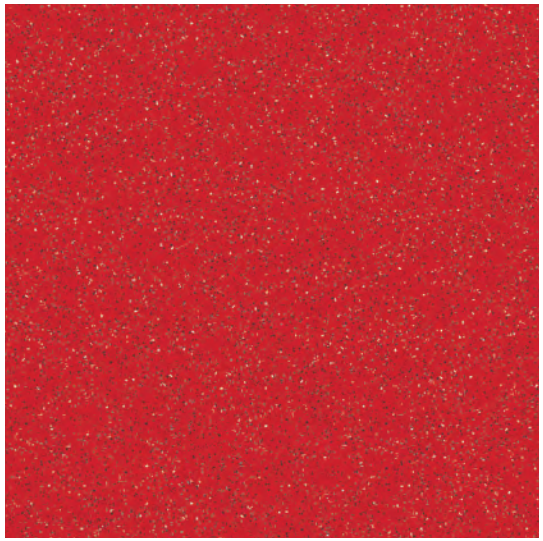


Fire Engine Red - 55
LRV 16.2

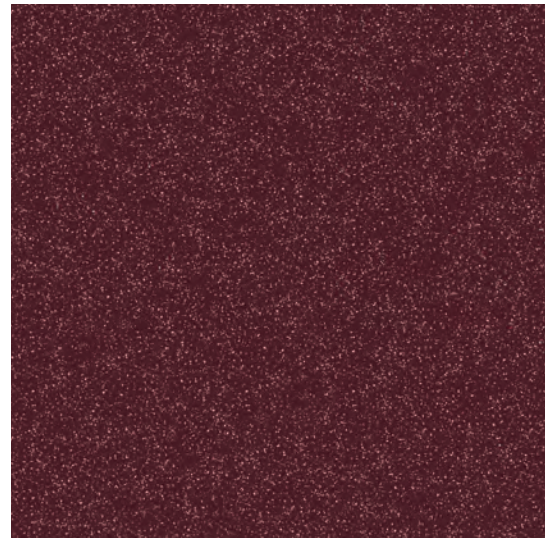


Shiraz - 56
LRV 7.7




Chestnut - 57
LRV 20.6

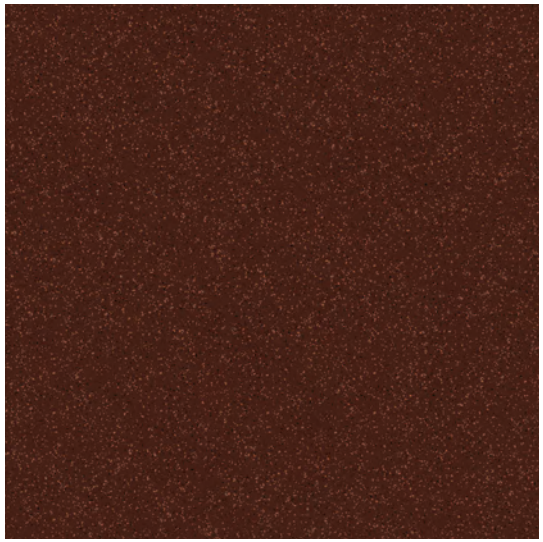


Espresso - 58
LRV 8.5

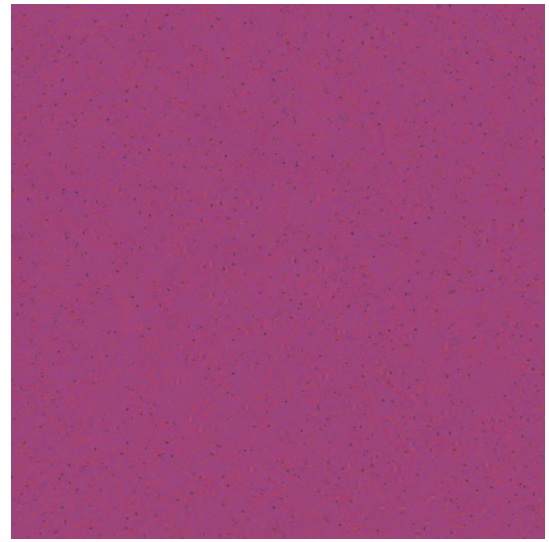


Doll House - 66
LRV 17.1

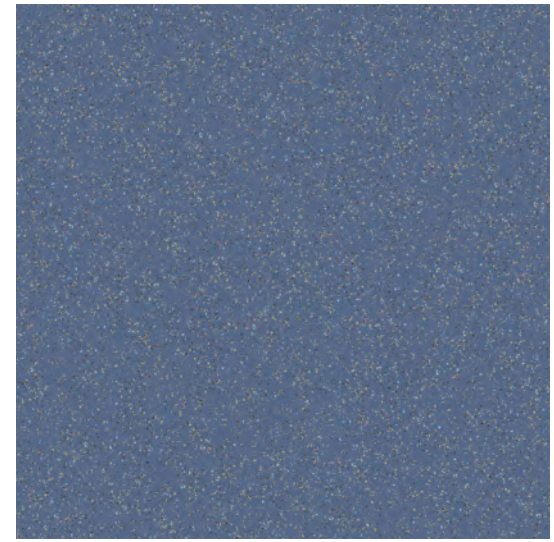


Rich Lavender - 68
LRV 17.0

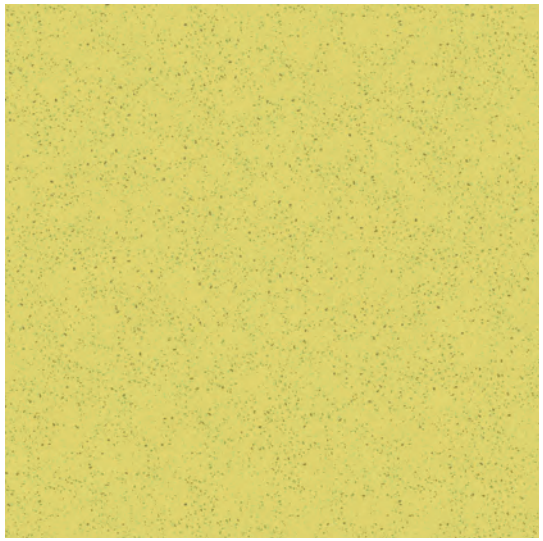


Limoncello - 72
LRV 62.6

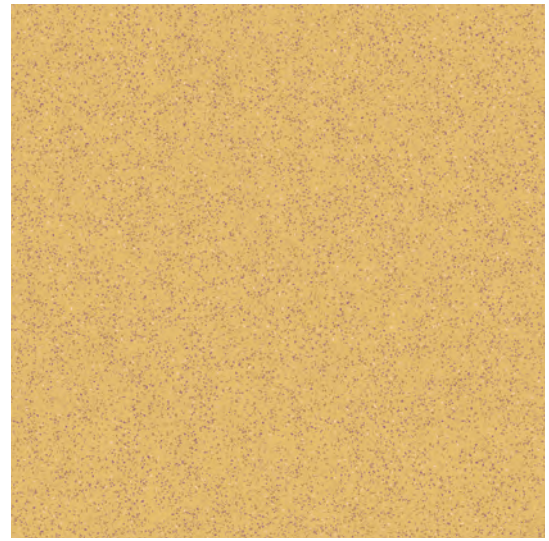


Banana Candy - 73
LRV 54.4

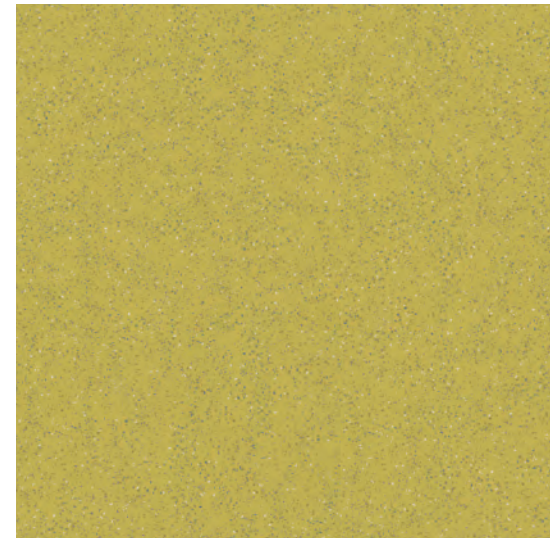


Buff - 74
LRV 47.2

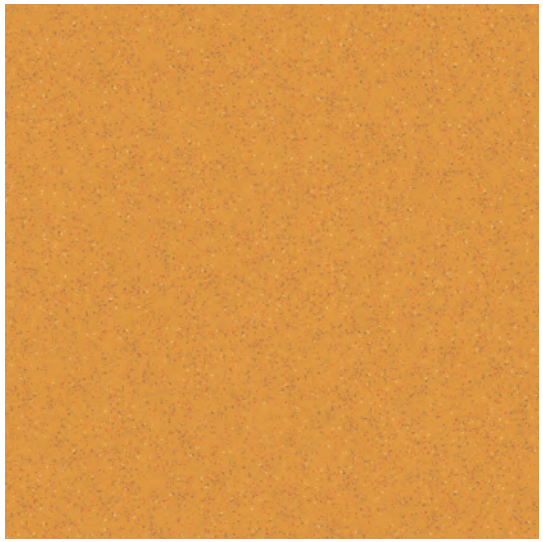

Orangerine - 75
LRV 37.1

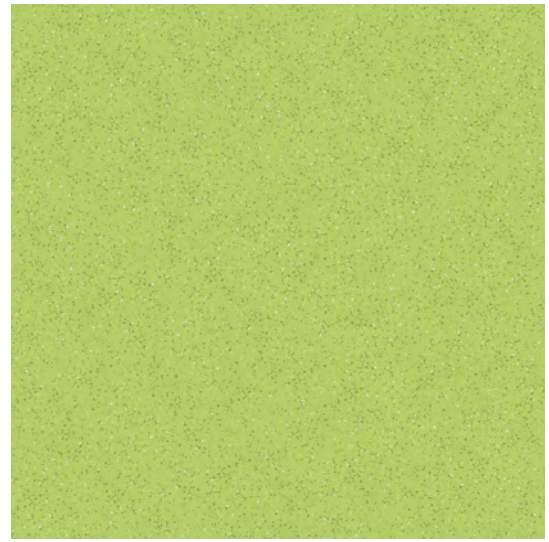


Pistachio - 83
LRV 49.1

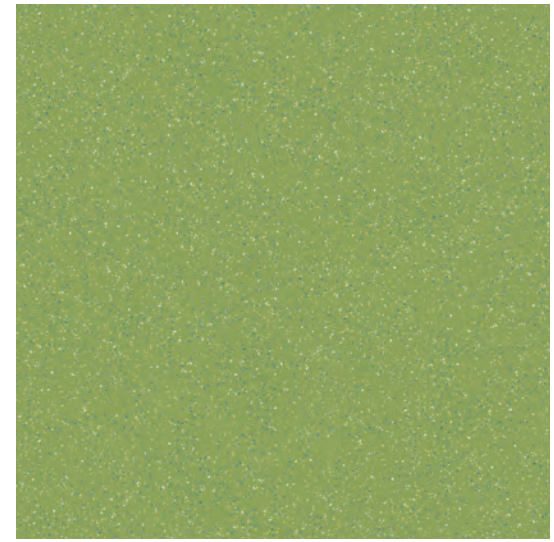


Olive Green - 85
LRV 31.6




Tundra - 87
LRV 23.5

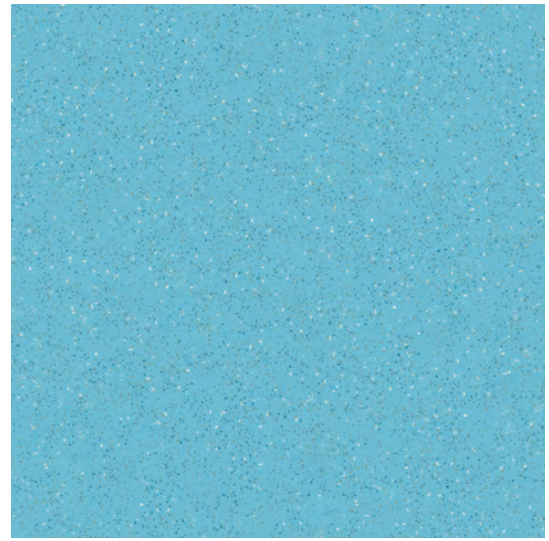


Baby Blue - 90
LRV 38.4

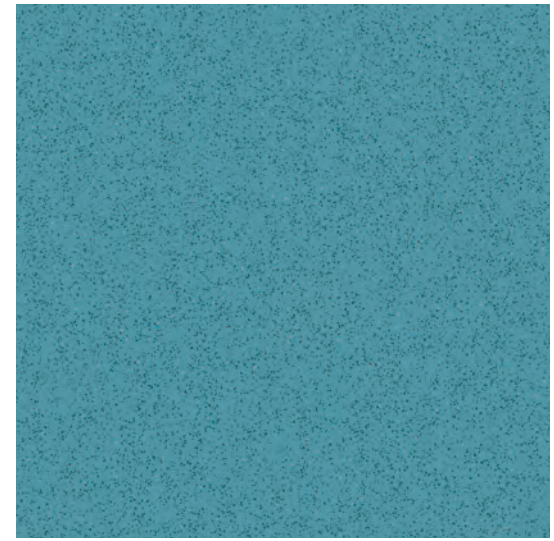


Aquamarine - 92
LRV 29.1

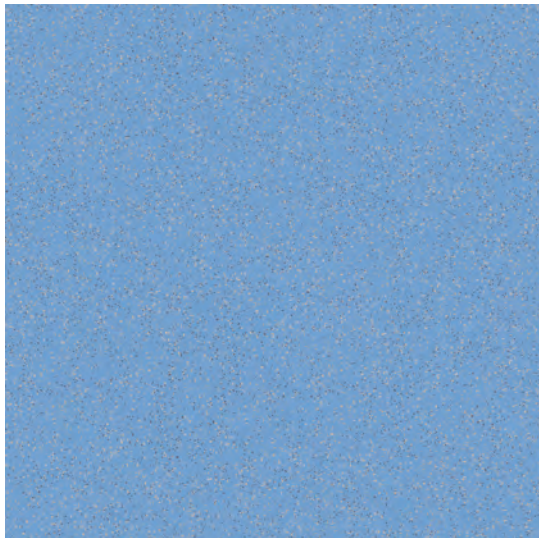

Forget-Me-Not - 94
LRV 30.7

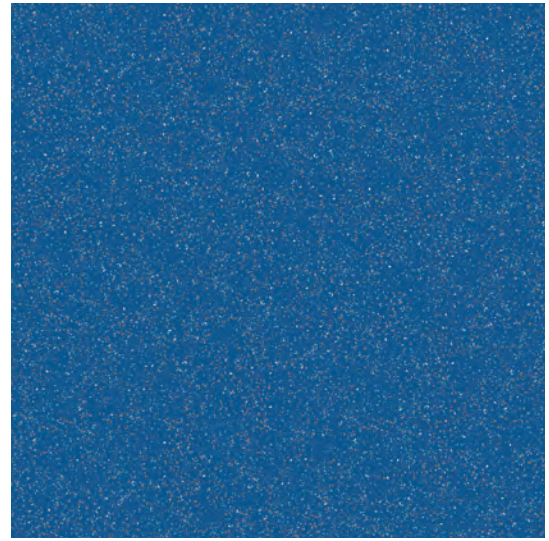

Electric Blue - 95
LRV 15.2

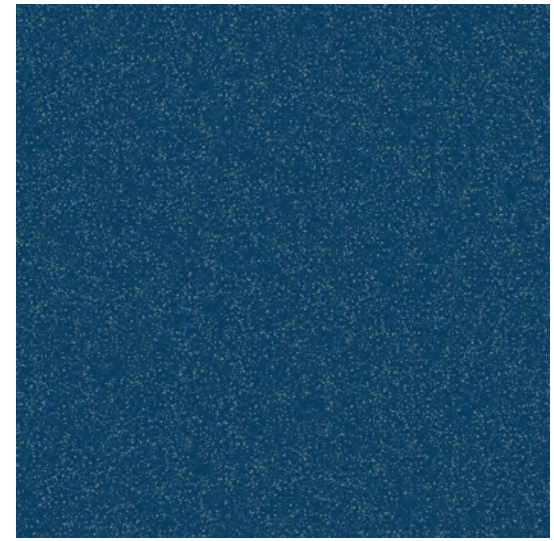

Blue Lagoon - 98
LRV 9.8

Product Specifications

Gauge	2mm and 3mm	Product flexibility for durability, acoustic and underfoot performance
Sizes	Rolls: (ABS)	1.5m width x 15.2 m length (nominal)
	Tiles: Available in 2 sizes (ABT)	- 450mm x 450mm - 902mm x 902mm
Product Classification Tiles ATSM F1344	Rubber Tile Floor	Type I, A or B (Homogeneous)
Product Classification Sheet ATSM F1859	Rubber Sheet Floor	Type 1 (Homogeneous)
ASTM D 3389	Abrasion Resistance (H-18,500g @ 1,000 cycles)	Pass
AS/NZS 4586-2013 - Appendix A	Wet Pendulum Slip Test	Class P4
AS ISO 9239.1-2003	Critical Radiant Flux CRF (kW/m²)	8.40
AS ISO 9239.1-2003	Smoke Development Rate	402% min
ASTM F 925	Chemical Resistance	Exceeds requirements
ASTM F 970	Static Load (Modified @ 2,000 PSI)	≤0.005"
ASTM F 1514	Heat Stability	ΔE ≤ 8.0
ASTM G 21	Antimicrobial/Antifungal Resistance Test	Pass (28 days)
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)	FloorScore Certified by SCS Certification Registration Number SCS-FS-01492
Limited Wear Warranty	10 years	
Resistance to Oils and Greases	ABPure is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.	
Antimicrobial/ Antifungal	IMPORTANT: All ABPure rubber flooring through its composition and without the use of antimicrobial chemicals, does not promote microbial growth.	
Sustainability / Environmental	Recycled content - 10% Declare Red List Free Environmental Product Declaration (EPD)	
Please note that technical website documents prevail.		

GEO Flooring Pty Ltd

www.geoflooring.com.au
info@geoflooring.com.au

