

AB PURE

Rubber Flooring flooring that does not colour fade

A breakthrough in technology that delivers totally - clean and crisp colours with unrivalled colorfastness.

AB PURE is a revolutionary patented "colour perfect" formulation.

AB PURE is the only rubber flooring that passes the ASTM F 1515.

So what you see is what you'll continue to see...

until you decide to redesign.







AB PURE Hammered - 36 Colours



AB PURE Hammered - 36 Colours

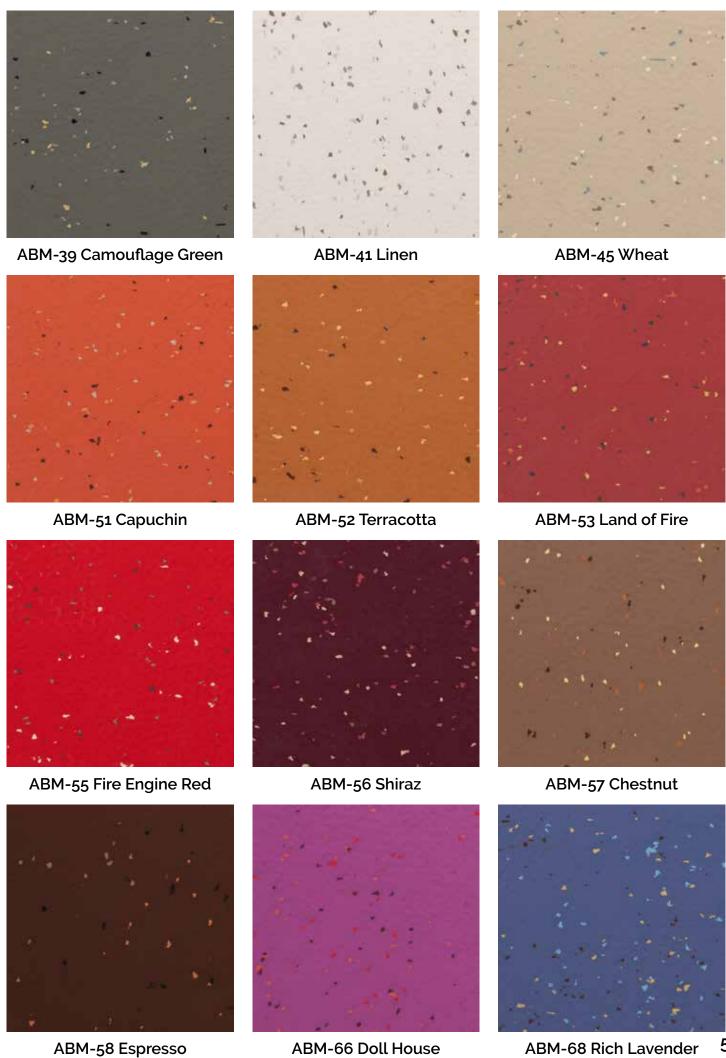

AB PURE Hammered - 36 Colours

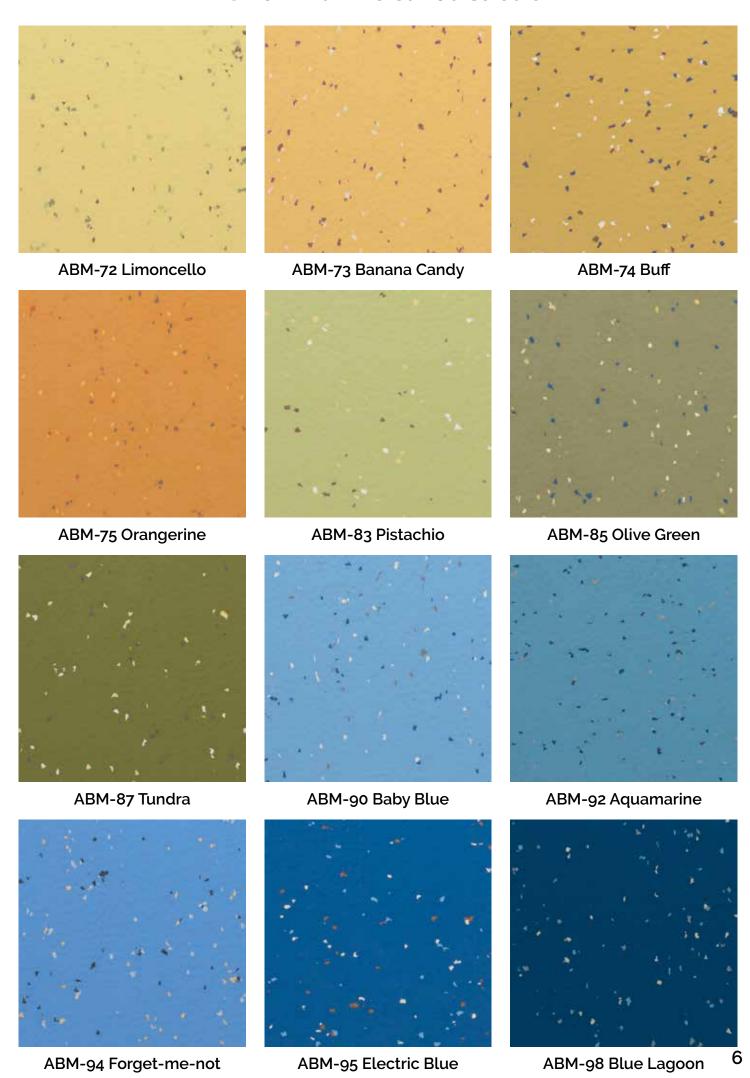

PURE Colours

Perfectly Formulated


with NFuse Technology




AB PURE Imagine - 36 Colours



AB PURE Imagine - 36 Colours

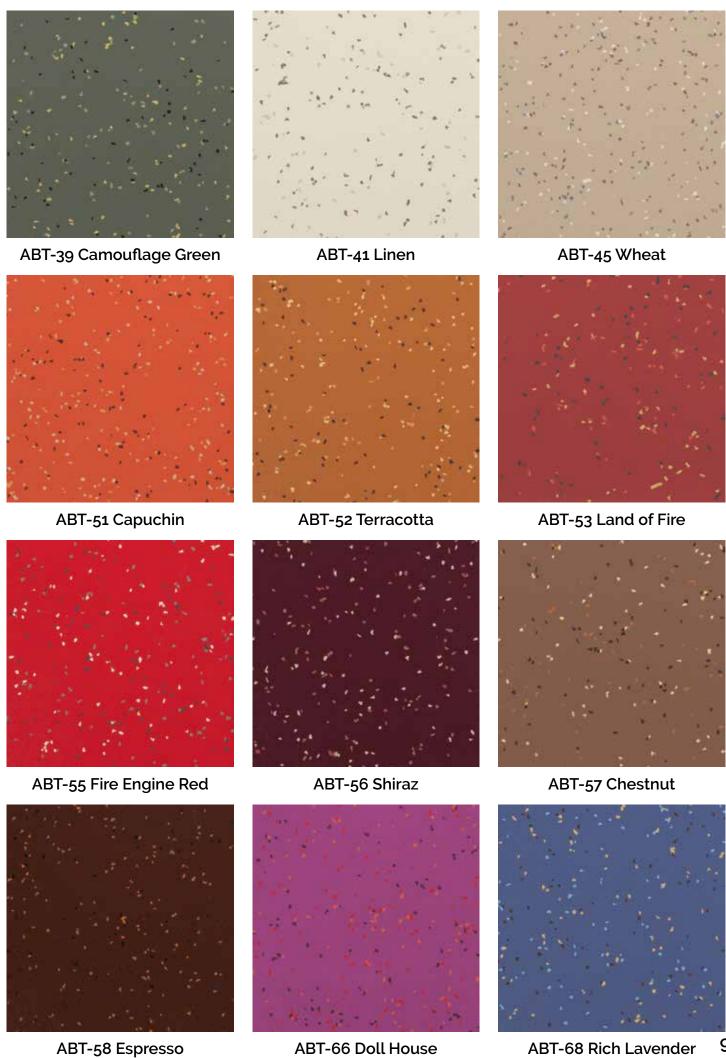

AB PURE Imagine - 36 Colours

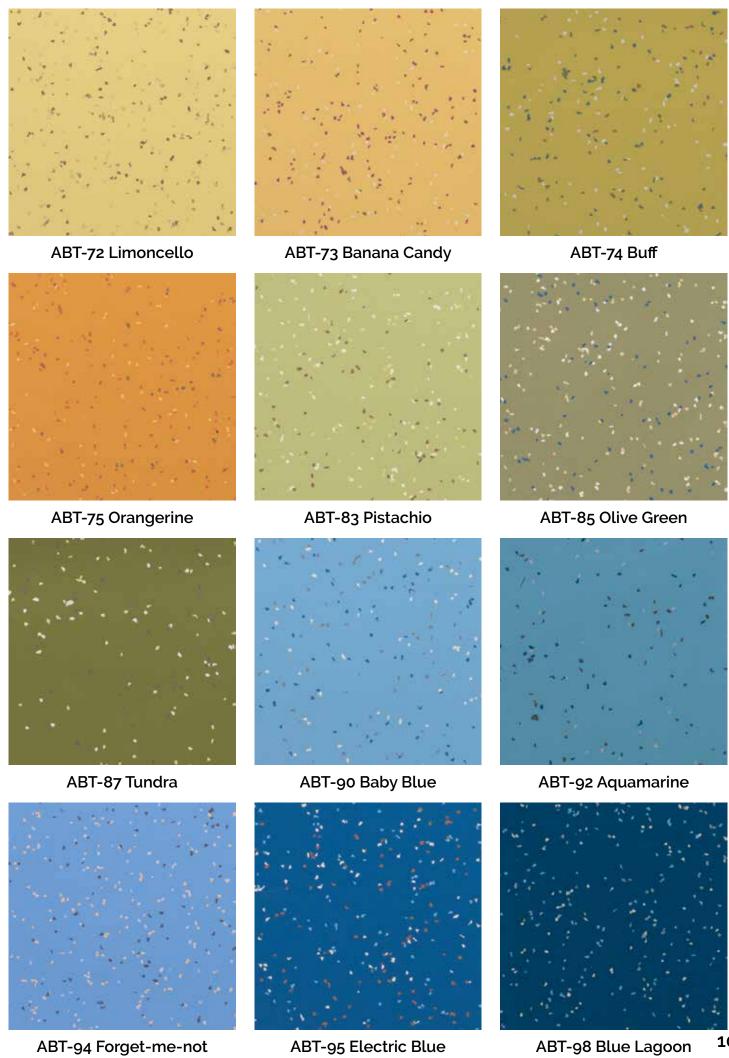

PURE Colours - Perfectly Patented

AB PURE's perfect colours are exceptionally resistant to exposure to light.

The intensity of the original colour and the integrity of the design are well preserved over time.

Putting Rubber in good light.



AB PURE Round - 36 Colours



AB PURE Round - 36 Colours



AB PURE Round - 36 Colours



Engineered to perform


- 10% pre-consumer recycled content
- PVC/Chlorine Free
- Treated to resist the growth of fungus and mould




AB PURE Slate - 36 Colours



AB PURE Slate - 36 Colours

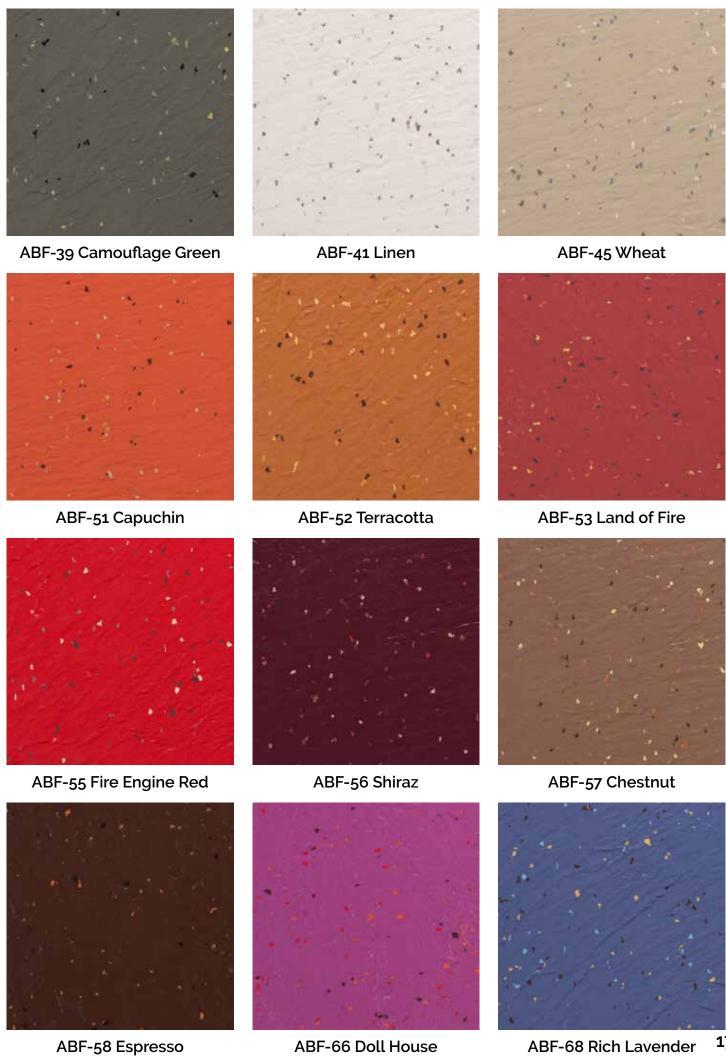

AB PURE Slate - 36 Colours

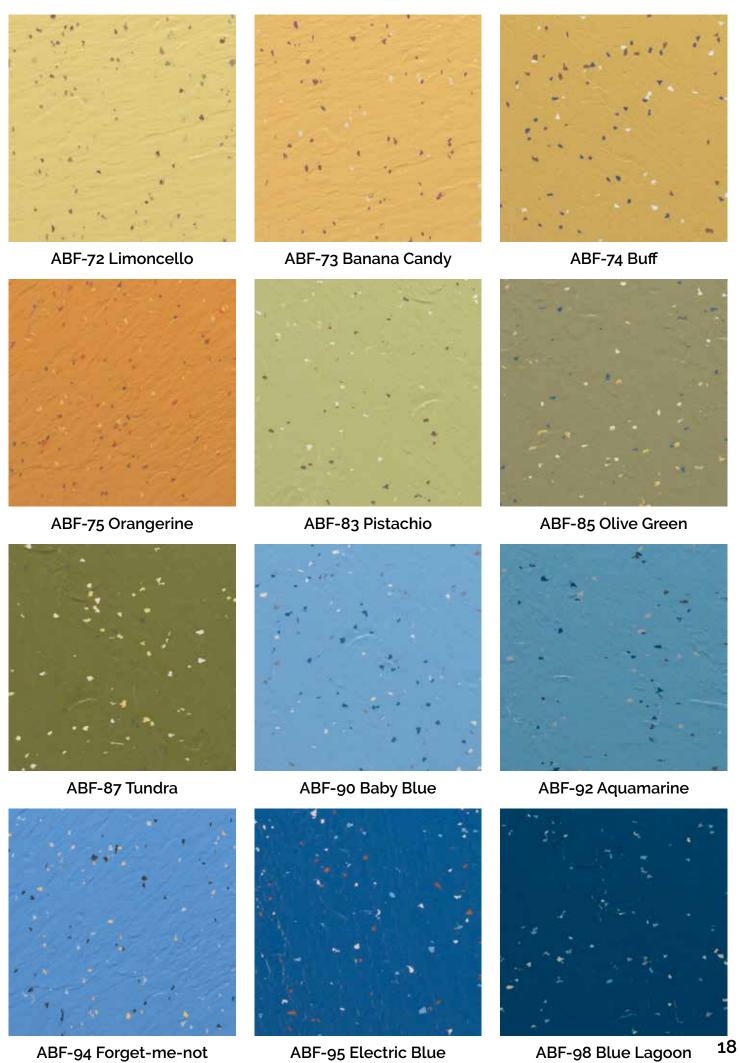

Nfuse Technology Benefits

From the outset the development of Nfuse technology was focussed specifically towards facility owners who need a durable rubber flooring that will:


- Dramatically reduce set-up costs
- Require minimum set-up time
- Facilitate a quicker "Occupancy Readiness"
- Offer simple maintenance capabilities
- Cost benefits apply to both tile and sheet/ roll products



AB PURE Natural Slate - 5 Colours



Engineered to Perform

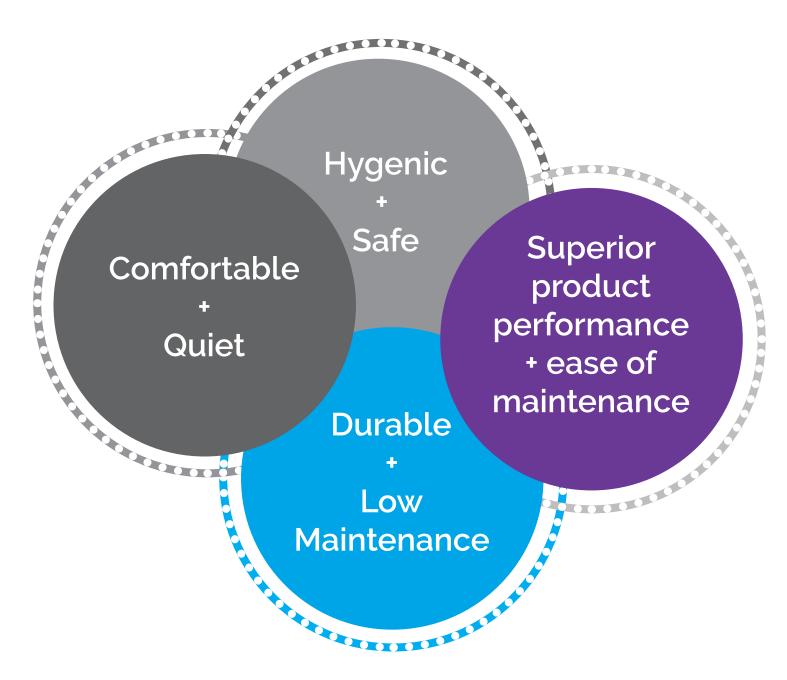

Outstanding color clarity and colorfastness combine with exceptional performance characteristics to provide a flooring solution that's perfectly practical and practically perfect.

AB PURE Technical Specifications

Product	Thickness	Size
AB Pure Hammered (ABM) Tile	3 mm	452 x 452 mm 905 x 905 mm
AB Pure Slate (ABF) Tile	3 mm	452 x 452 mm 905 x 905 cm
AB Pure Natural Slate (ABA) Tile	3 mm	452 x 452 mm 905 x 905 cm
AB Pure Round (ABR) Tile	3 mm	450 x 450 mm 900 x 900 mm
AB Pure Imagine (ABT) Tile	2mm	452 x 452 mm 905 x 905 mm
	3 mm	452 x 452 mm 905 x 905 mm
AB Pure Imagine (ABS) Sheet/Roll	2 mm	1.5 m x 15.2 m
	3 mm	1.5 m x 15.2 m

AB PURE Technical Specifications

Composition	Homogeneous		
ASTM D 3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles (Tiles	Pass	
ASTM E 648	Critical Radiant Flux CRF(W/cm²)	> 0.45	
ASTM E 662	Smoke Density	≤ 450	
ASTM E 989/ E 492	Sound Absorption (with suspended ceiling)	IIC 59	
ASTM F 925	Chemical Resistance	Exceeds standards	
ASTM F 970	Static Load (modified at 1,000 psi for tile / 2,000 psi for sheet	≤0.005"	
ASTM F 1514	Heat Stability	ΔE ≤ 8	
ASTM F 1515	Light Stability	ΔE ≤ 8	
ASTM G 21	Antimicrobial/Antifungal Resistance Test	Pass (28 days)	
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)	FloorScore Certified by SCS Certification Registration Number SCS-FS-01492	
Limited Wear Warranty		10 years	
Resistance to oils and greases	ABPURE is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal, or vegetable.		
Antimicrobial/ Antifungal	IMPORTANT: All ABPURE rubber flooring contains inhibitors that gives this flooring antimicrobial and antifungal properties.		

Please note that technical website documents prevail.



GEO Flooring PO Box 766 Mosman NSW 2088 +61 2 9960 4199 www.geoflooring.com.au