

A photograph showing the lower halves of several people walking on a blue textured floor. The floor has a distinct diamond-shaped pattern. The people are wearing various casual clothing items like jeans, plaid pants, and colorful shirts. The background is a plain white wall.

# GEO FLOORING

ABMarathon Round


# ABMARATHON®

A rubber flooring collection that is not afraid to be stepped on.

Made for high traffic environments

Improved vulcanized rubber formula

- Easier to clean
- Improved stain resistance
- Improved colour stability, less shades

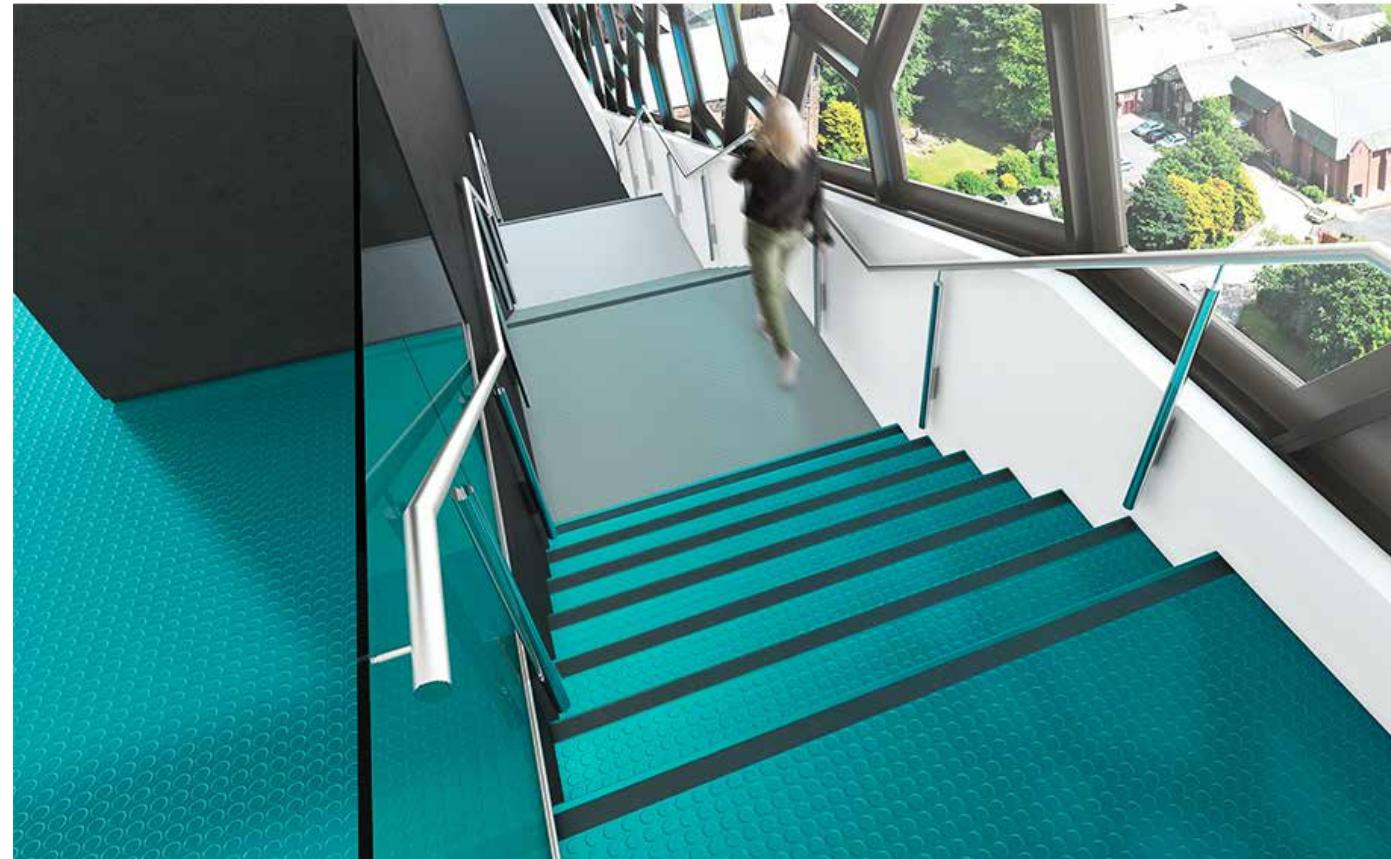

If your goal is to select **carbon- neutral materials**, ABMARATHON® can be produced with renewable natural gas made from organic waste, which reduces greenhouse gases at the source..

## Declare.




What is Declare?

The program provides a clear and informative label for building products and supports the Living Building Challenge's Red List for material transparency and toxic chemical avoidance as well as simplifying material specification and project certification.


What is the Red List and what does it mean to be Red List Free?

The Red List represents the "worst in class" materials, chemicals, and elements known to pose serious risks to human health and the greater ecosystem. For a product to be awarded Red List Free status means that it does not contain any ingredients on the Living Building Challenge Red List.


To learn more about the Living Building Challenge, visit [www.living-future.org/lbc](http://www.living-future.org/lbc).

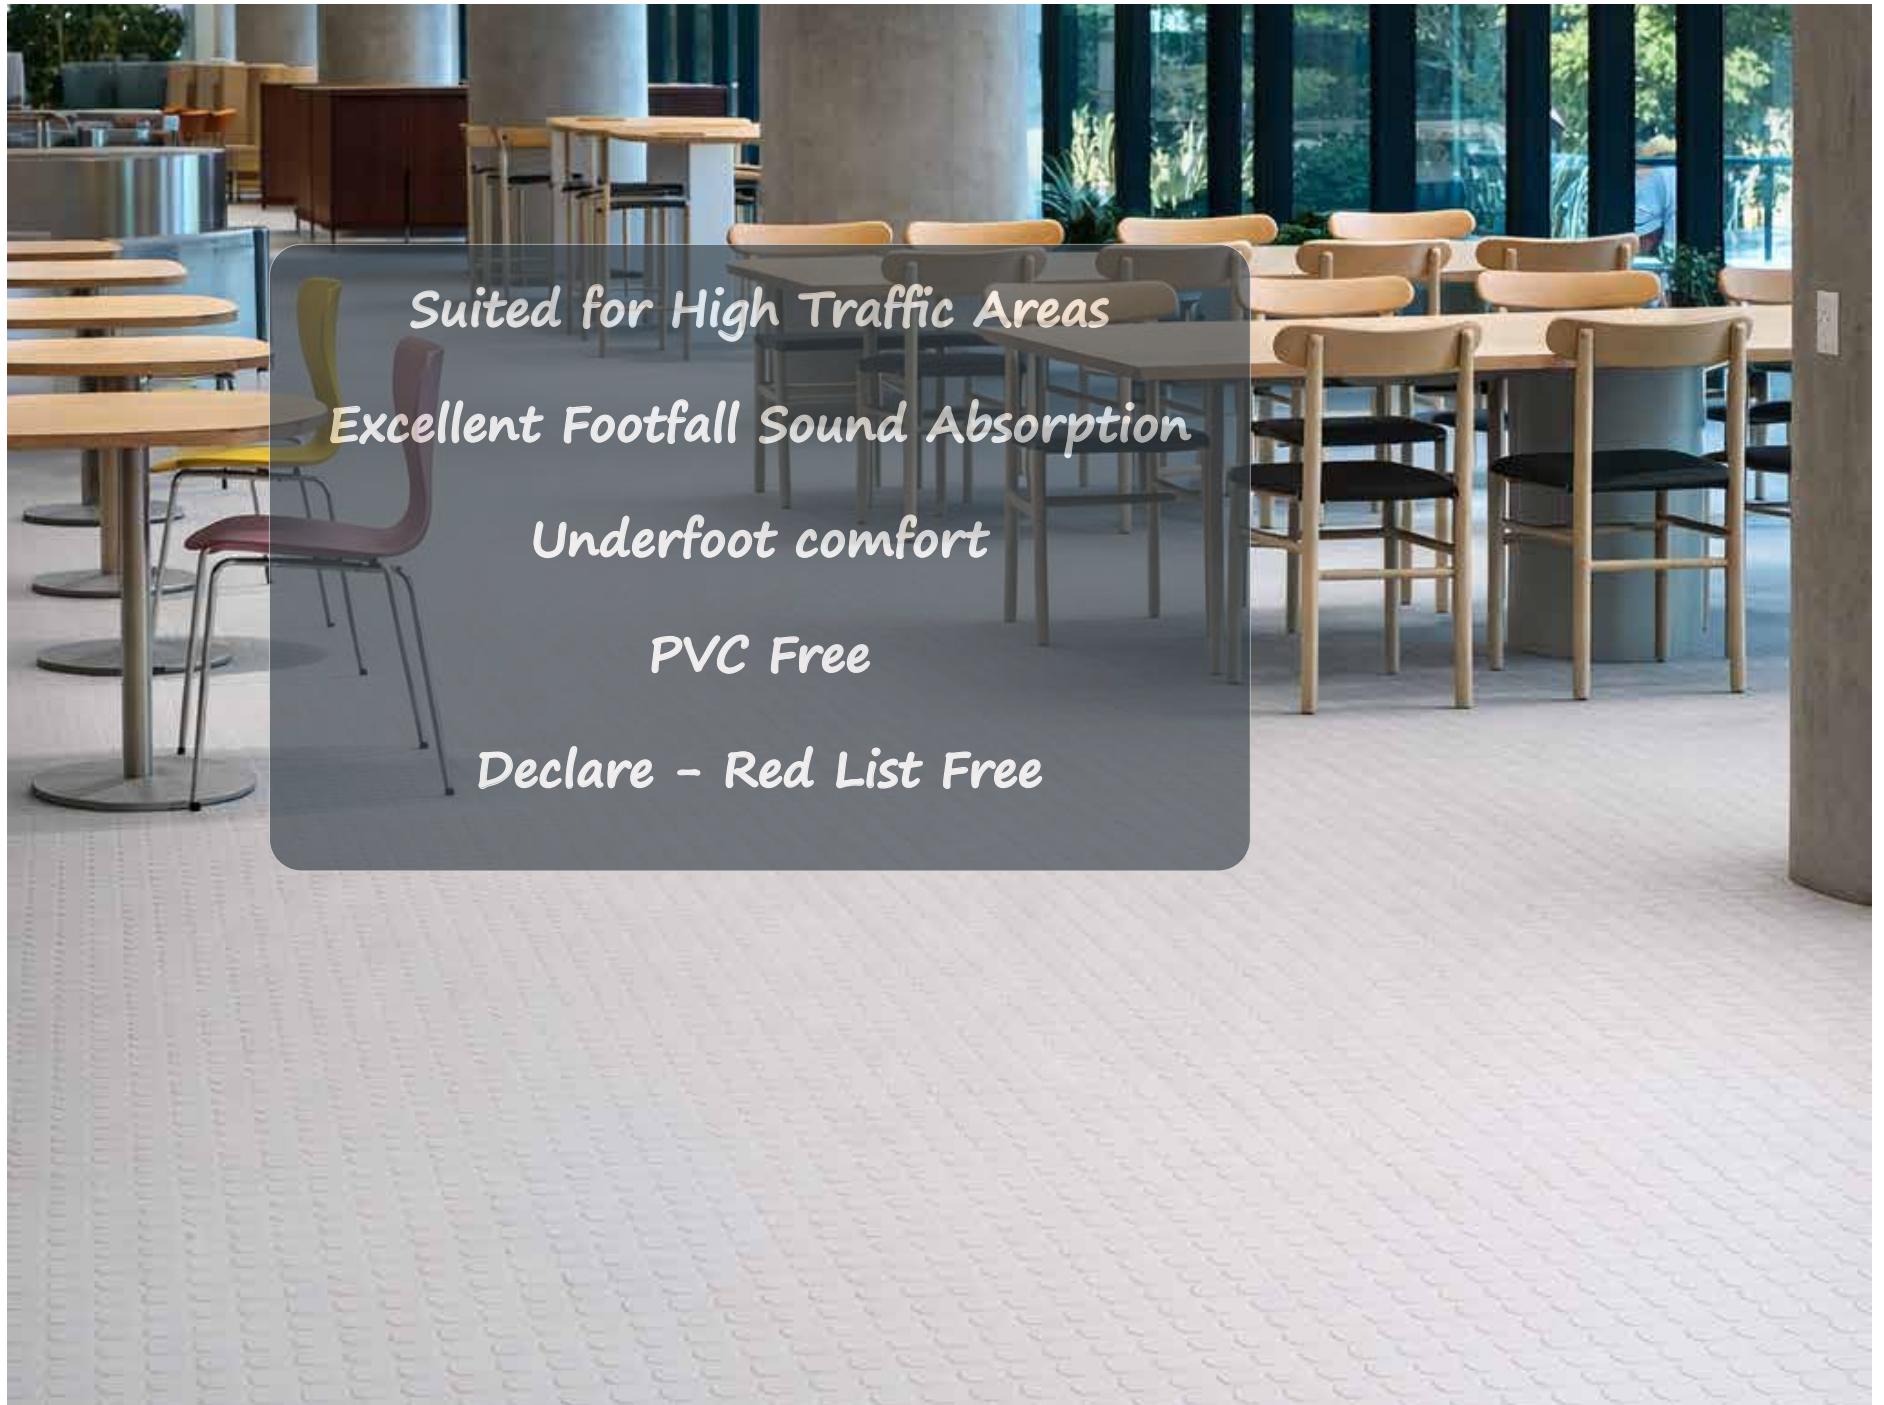


## ABMARATHON ROUND

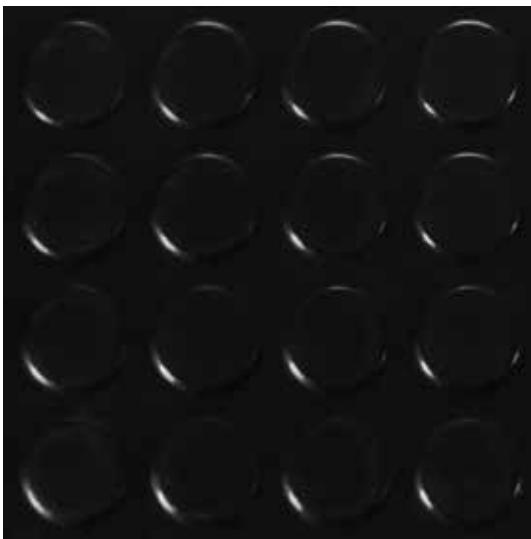


Onyx Black - MCR20  
# LRV 5.1

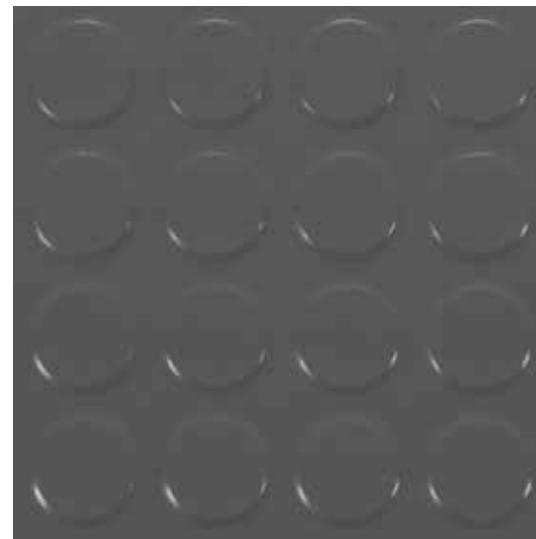


Spy Grey - MCR22  
# LRV 11.2

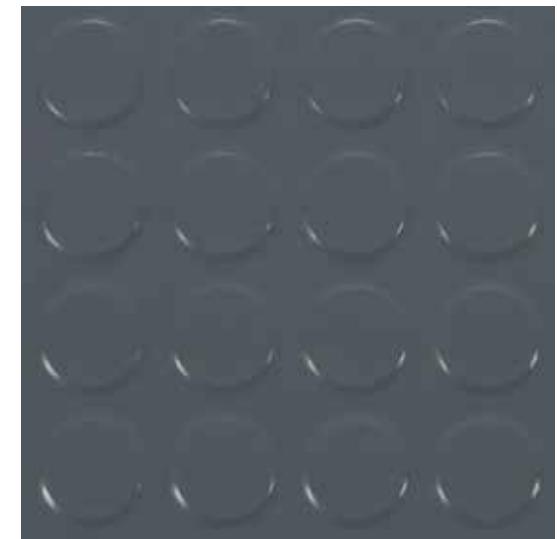


Battle Grey - MCR24  
# LRV 10.1

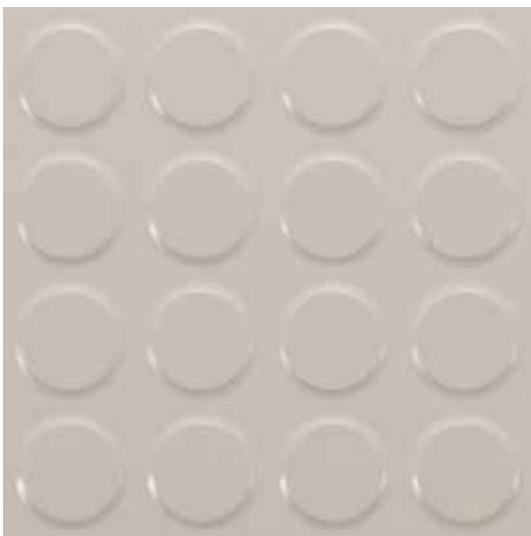

Sand Castle - MCR30  
# LRV 54.9

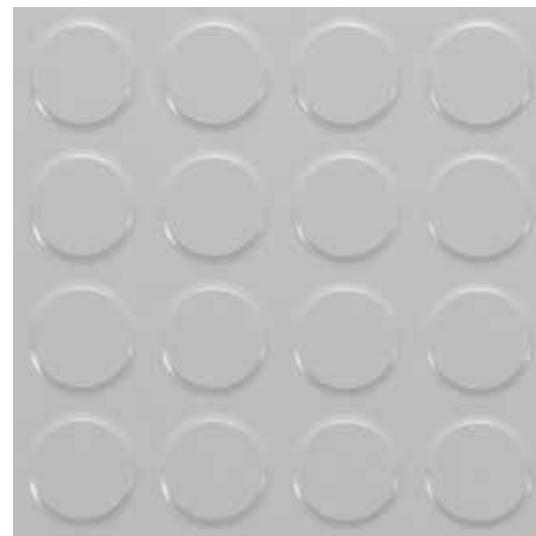


Gainesboro Valley - MCR31  
# LRV 57.5

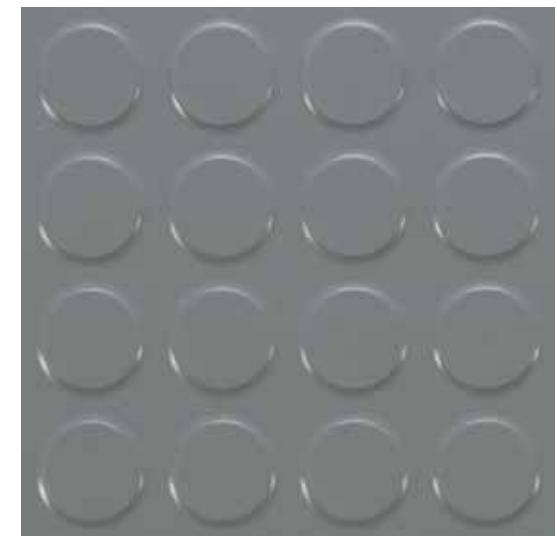


Polished Pewter - MCR33  
# LRV 24.7


## ABMARATHON ROUND

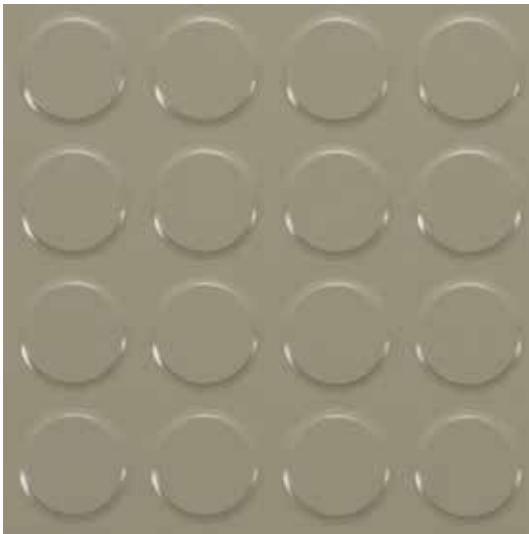


*Tan - MCR36*  
# LRV 31.7

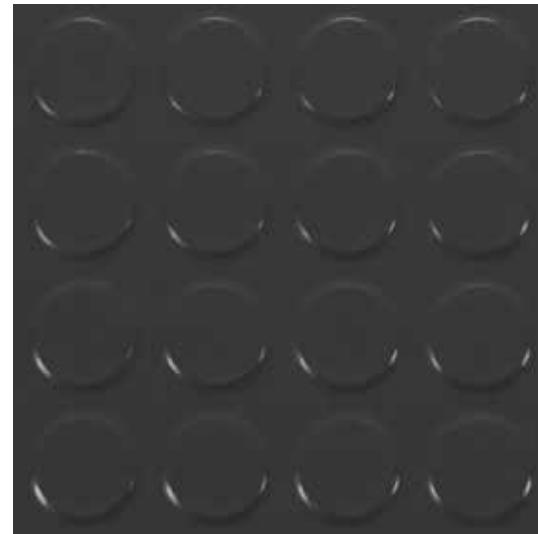


*Carriage Grey - MCR37*  
# LRV 8.3

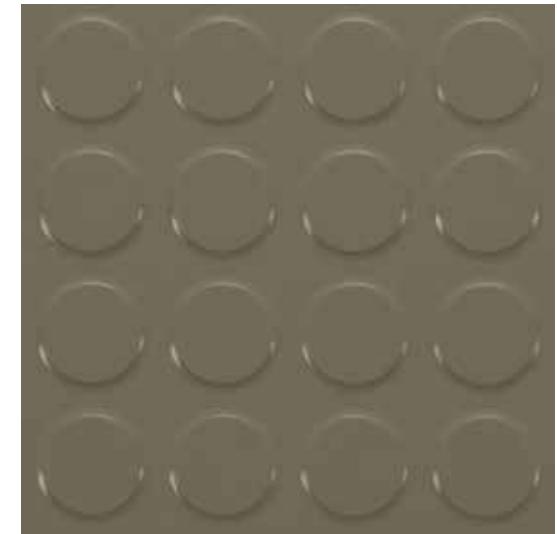


*Warm Stone - MCR38*  
# LRV 20.8

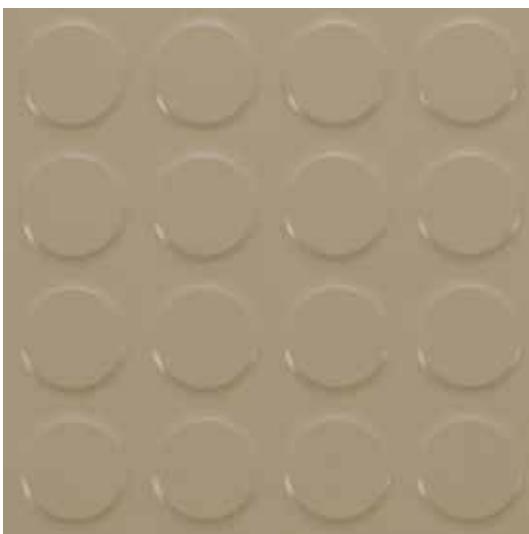

*Smokey Beige - MCR43*  
# LRV 43.3

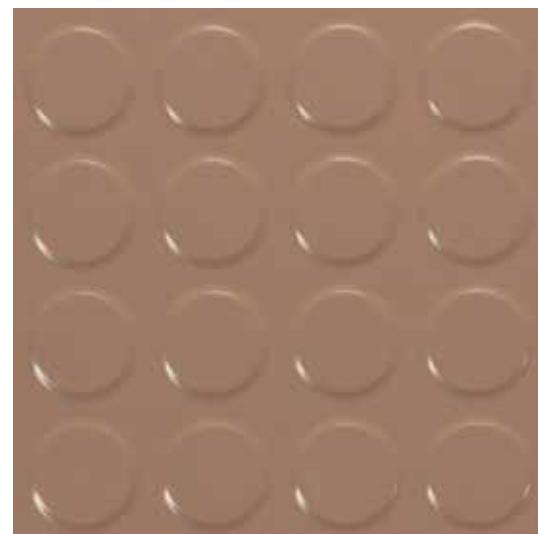


*Baked Earth - MCR46*  
# LRV 30.7

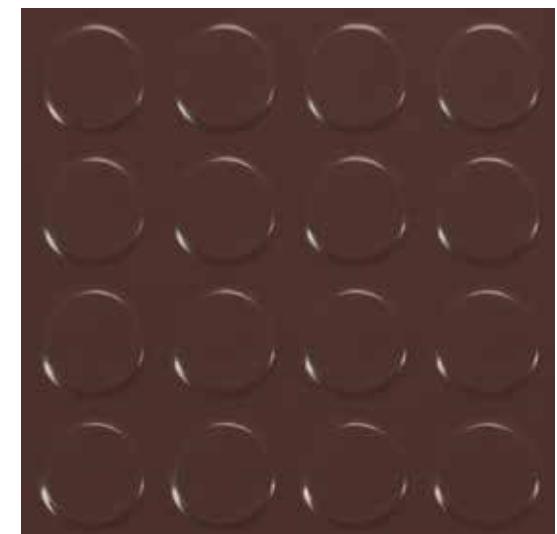


*Deep Chestnut - MCR48*  
# LRV 8.5


## ABMARATHON ROUND

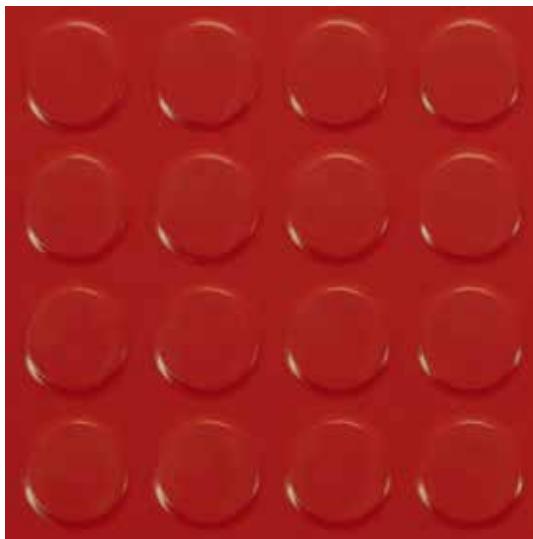


Red Du Jour - MCR54  
# LRV 15.2

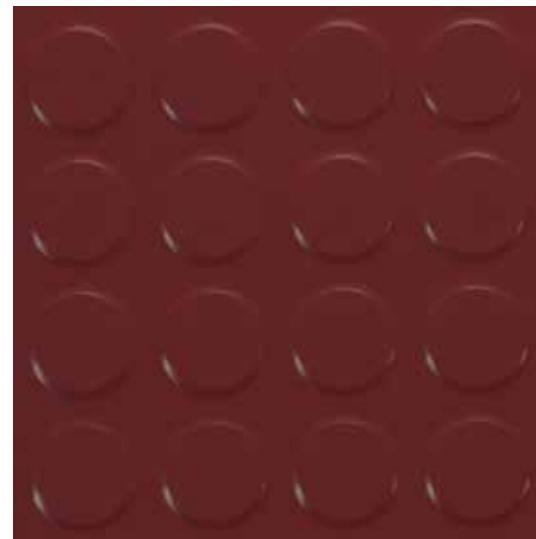


Explore Red - MCR58  
# LRV 8.4

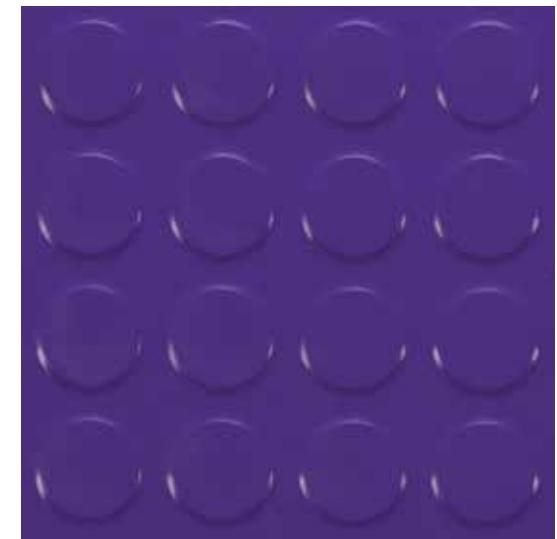


Violet Riot - MCR65  
# LRV 10.0

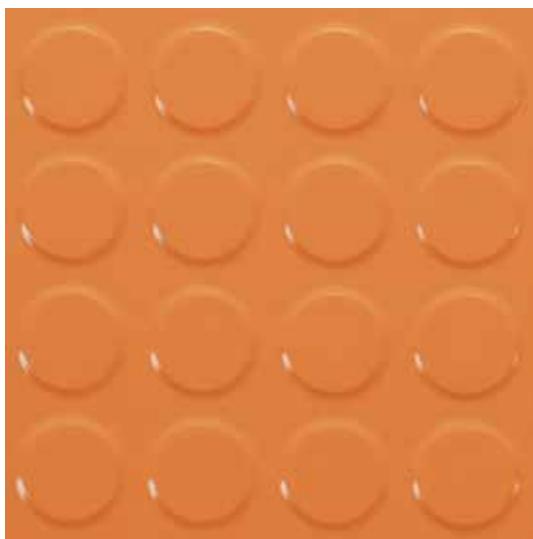


Chummy Orange - MCR77  
# LRV 42.1

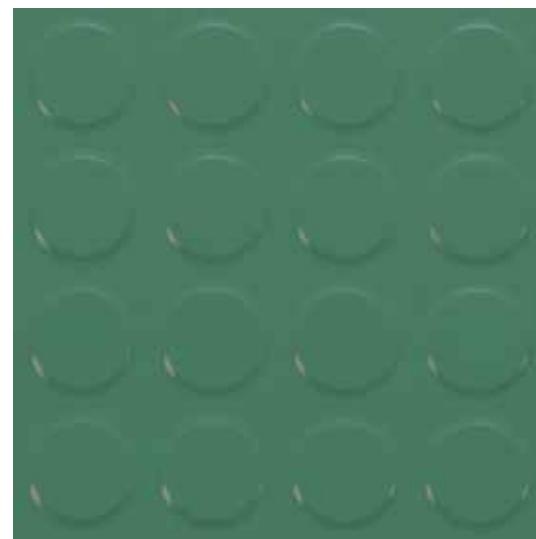


Equilibrium Green - MCR85  
# LRV 17.8

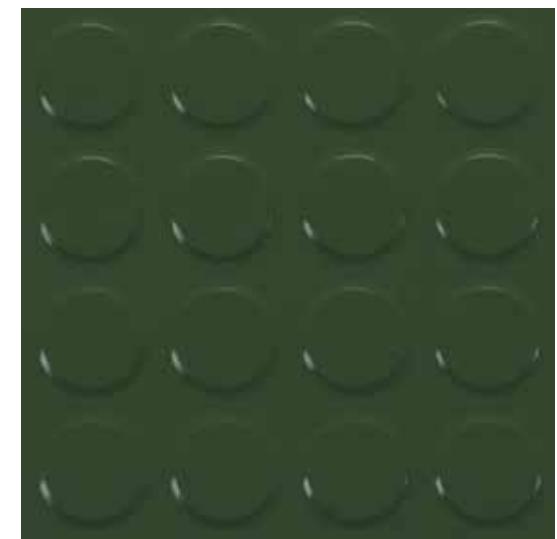


Forever Green - MCR87  
# LRV 10.8

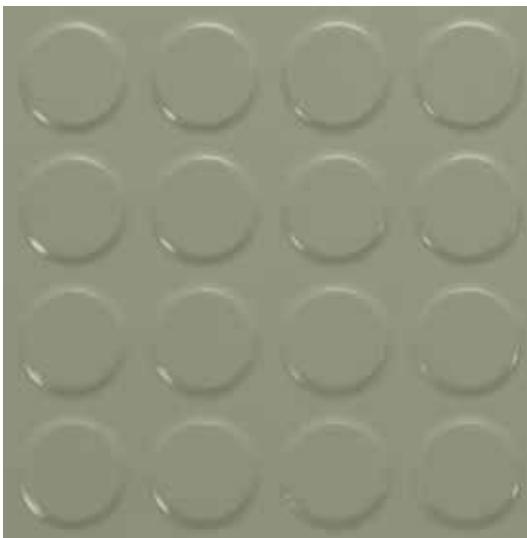


Eco Green - MCR88  
# LRV 32.3

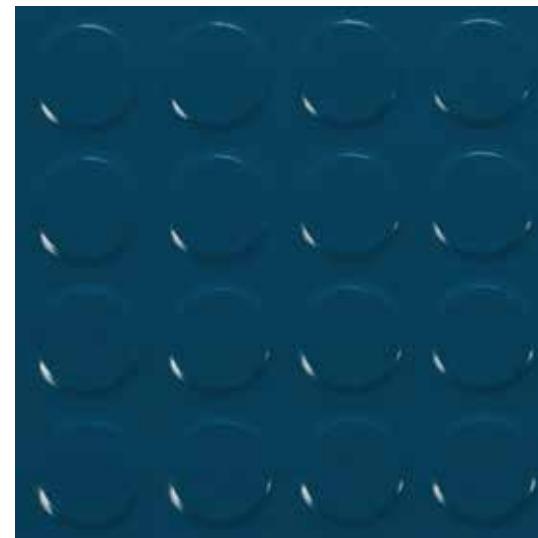


Night Sky - MCR 91  
# LRV 6.5

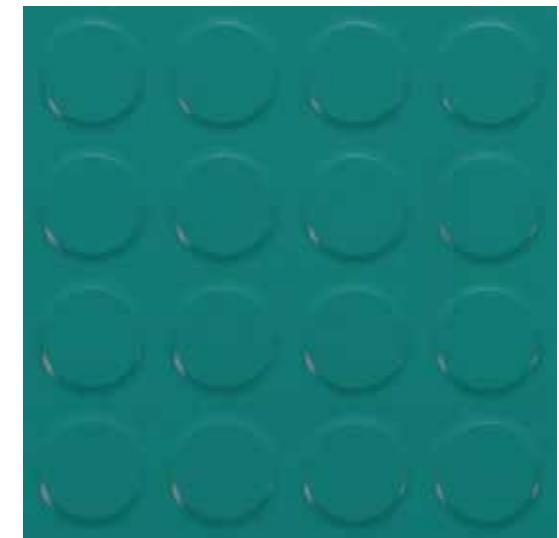

New Gen Blue - MCR94  
# LRV 17.8

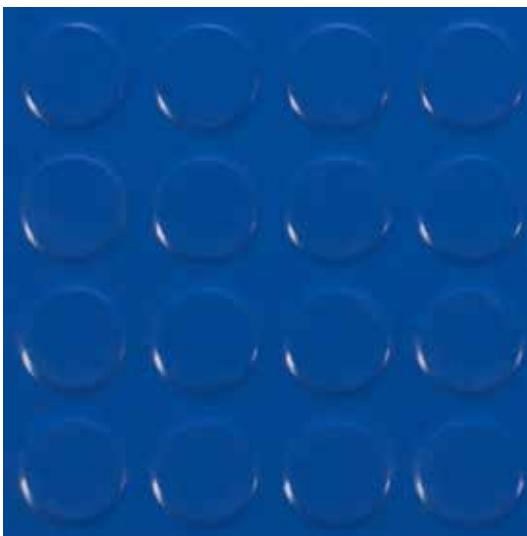

Quebec Blue - MCR95  
# LRV 10.1

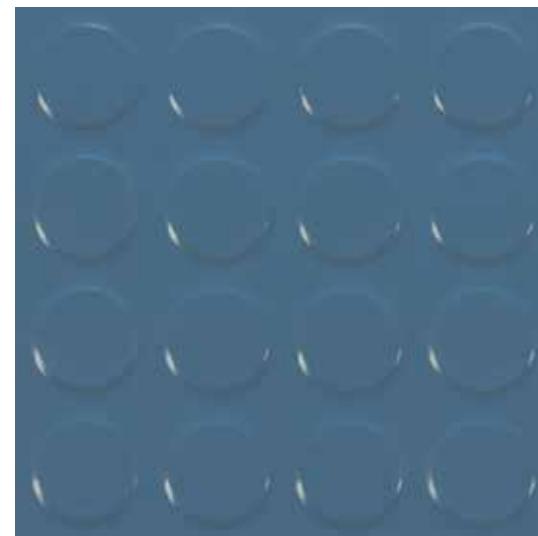

Lake Blue - MCR96  
# 16.5

## Custom Colors

Available for ABMARATHON® collections.

*Let your brand do the talking*

Work with our color lab to create on-demand colors to match your institution's brand or to achieve your design vision. The minimum quantity requirement of 200 m<sup>2</sup> can be used between tiles and stair treads and multiple profiles.

# LRV - Light Reflectance Value

# Product Specifications

Gauge	3mm	
Sizes	906 x 906 mm or 452 x 452 mm	
Product Classification ATSM F1344	Rubber Tile Floor	Type I, A or B (Homogeneous)
ASTM D 3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles)	Pass
AS/NZS 4586-2013 - Appendix A	Wet Pendulum Slip Test	Class P3
AS ISO 9239.1-2003	Critical Radiant Flux CRF (kW/m <sup>2</sup> )	8.40
AS ISO 9239.1-2003	Smoke Development Rate	402% min
ASTM F 925	Chemical Resistance	Meets requirements
ASTM F 970	Static Load	≤0.005"
ASTM F 1514	Heat Stability	ΔE ≤ 8.0
ASTM G 21	Antimicrobial/Antifungal Resistance Test	Pass (28 days)
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)	FloorScore Certified by SCS Certification Registration Number SCS-FS-01492
Limited Wear Warranty	10 years	
Antimicrobial/ Antifungal	IMPORTANT: All ABMarathon rubber flooring through its composition and without the use of antimicrobial chemicals, does not promote microbial growth.	
Please note that technical website documents prevail.		

*GEO Flooring Pty Ltd*

[www.geoflooring.com.au](http://www.geoflooring.com.au)  
[info@geoflooring.com.au](mailto:info@geoflooring.com.au)

